

Prioritetskøer med Afskæring

Rajamani Sundar, *Worst-case data structures for the priority queue with attrition*,
Information Processing Letters, 31(2), 69-75, 1989.

Operationer

Create


$$S := \emptyset$$

Insert(x)

$$S := \{ x \} \cup \{ y \in S \mid y < x \}$$

Deletemin

$$m := \min(S); S := S \setminus \{ m \}; \text{return } m$$

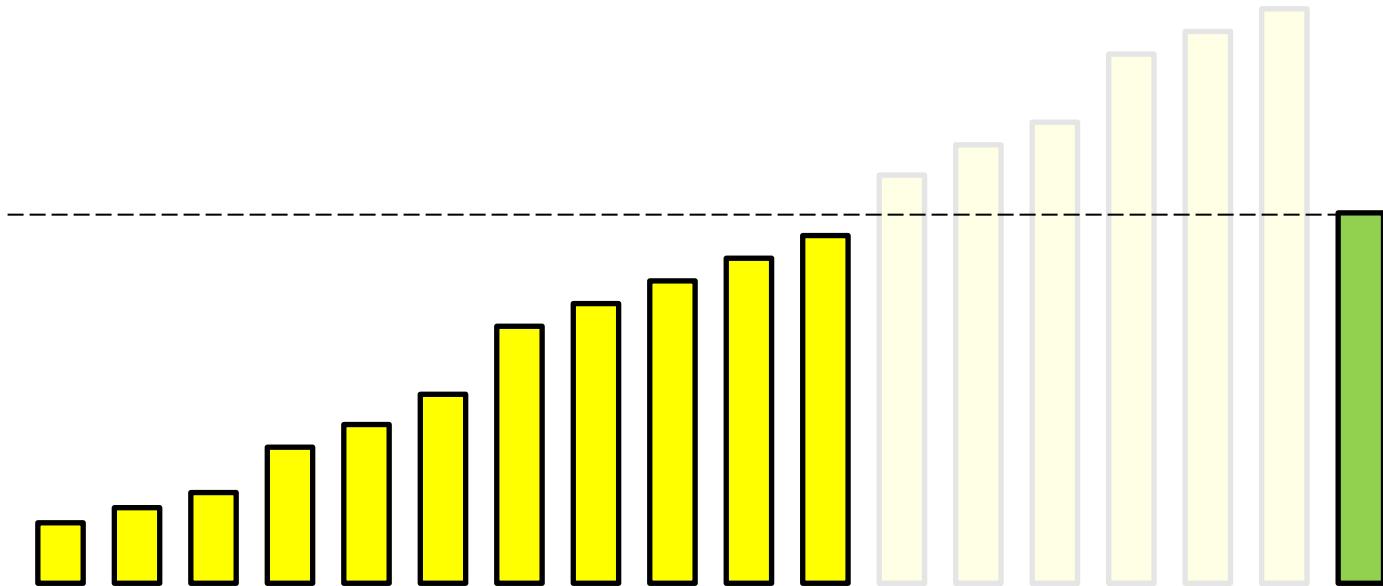

Løsning: Sorteret Liste

Create


$S := ()$

Insert(x)

while ($|S| > 0$ and $\text{tail}(S) \geq x$) $\text{remove_tail}(S)$
 $\text{insert_tail}(x)$

DeleteMin

return $\text{remove_head}(S)$

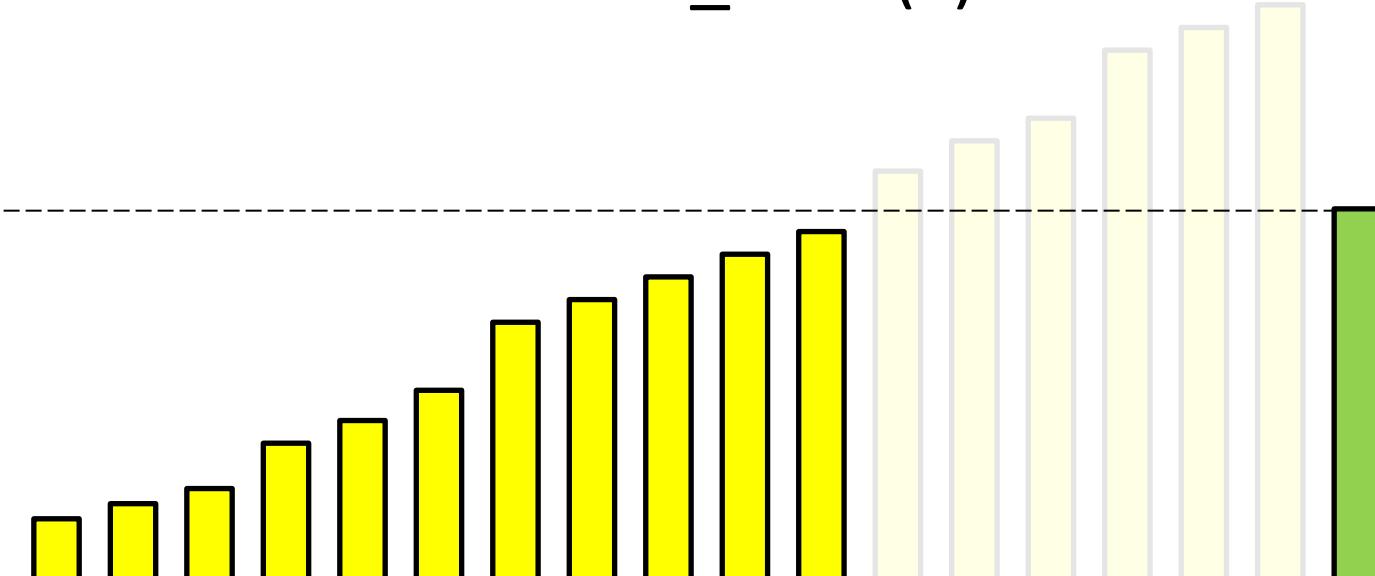

Løsning: Sorteret Liste

Create $S := ()$

Insert(x) while ($|S| > 0$ and $\text{tail}(S) \geq x$) $\text{remove_tail}(S)$
 $\text{insert_tail}(x)$

DeleteMin return $\text{remove_head}(S)$

Sætning

Create, Insert og DeleteMin tager **amortiseret** $O(1)$ tid

Bevis: $\Phi(S) = |S|$. □


Worst-Case $O(1)$

Løsning: 4 Lister

Invarianter

- 1) C, B, D_f sorterede
- 2) $\max C \leq \min (B \cup D_f \cup D_r)$
- 3) $|C| \geq |D_f| + 2|D_r|$

$$17 \geq 4+2\cdot 5$$

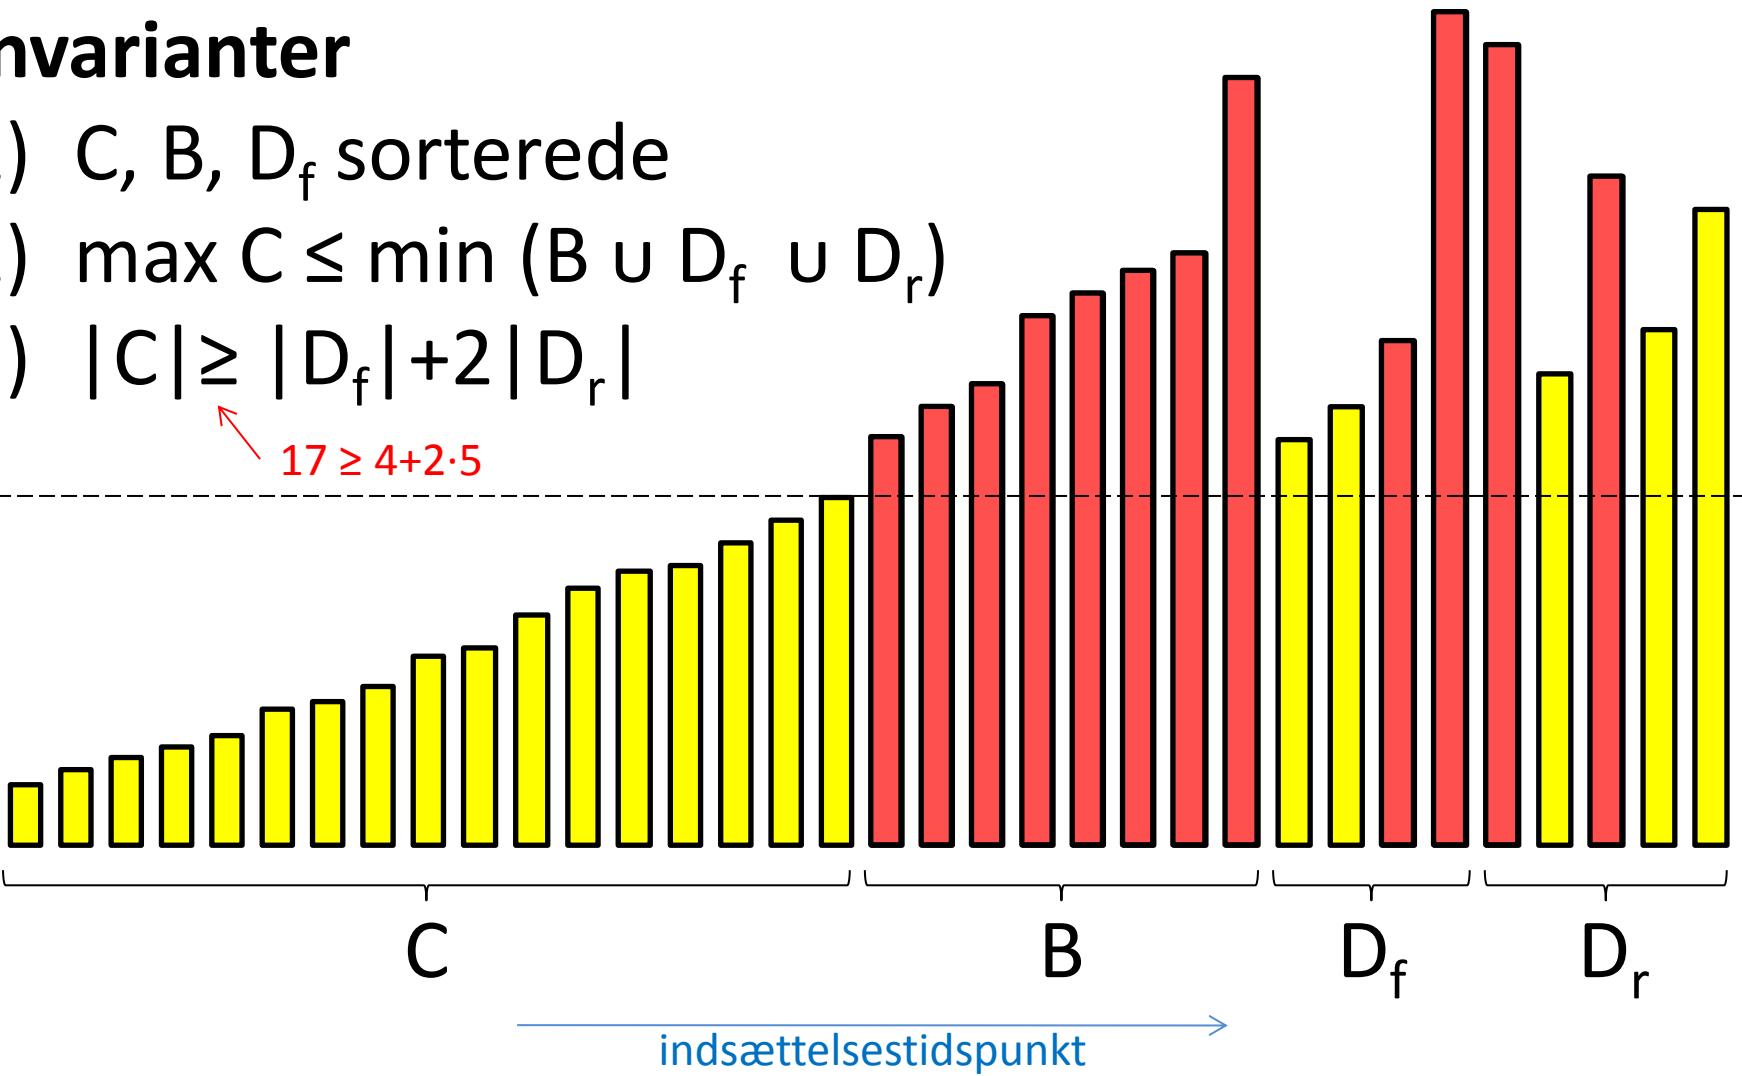

CREATEPQA ≡

$C, B, D_f, D_r := (\), (\), (\), (\)$

INSERT(x) ≡

if $C \neq (\)$ **and** $\text{first}(C) \geq x$ **then**
 {Delete all existing items; add x to C }

1 $C, B, D_f, D_r := (x), (\), (\), (\)$

else if $C \neq (\)$ **and** $\text{last}(C) \geq x$ **then**

 {Empty B , D_f , and D_r ; push back $\text{rest}(C)$ into B ; add x to D_f }

2 $C, B, D_f, D_r := (\text{first}(C)), \text{rest}(C), (x), (\)$

3 **else** $D_r := D_r \parallel (x)$; **BIAS**; **BIAS**

Invarianter

1) C, B, D_f sorterede

2) $\max C \leq \min (B \cup D_f \cup D_r)$

3) $|C| \geq |D_f| + 2|D_r|$

$\geq " +1 "$

BIAS

DELETEMIN ≡

BIAS;

return **DELETEFIRST**(C)

{**BIAS** ensures that $C \neq (\)$, unless the PQA is empty}

3

2


1

C

B

D_f

D_r

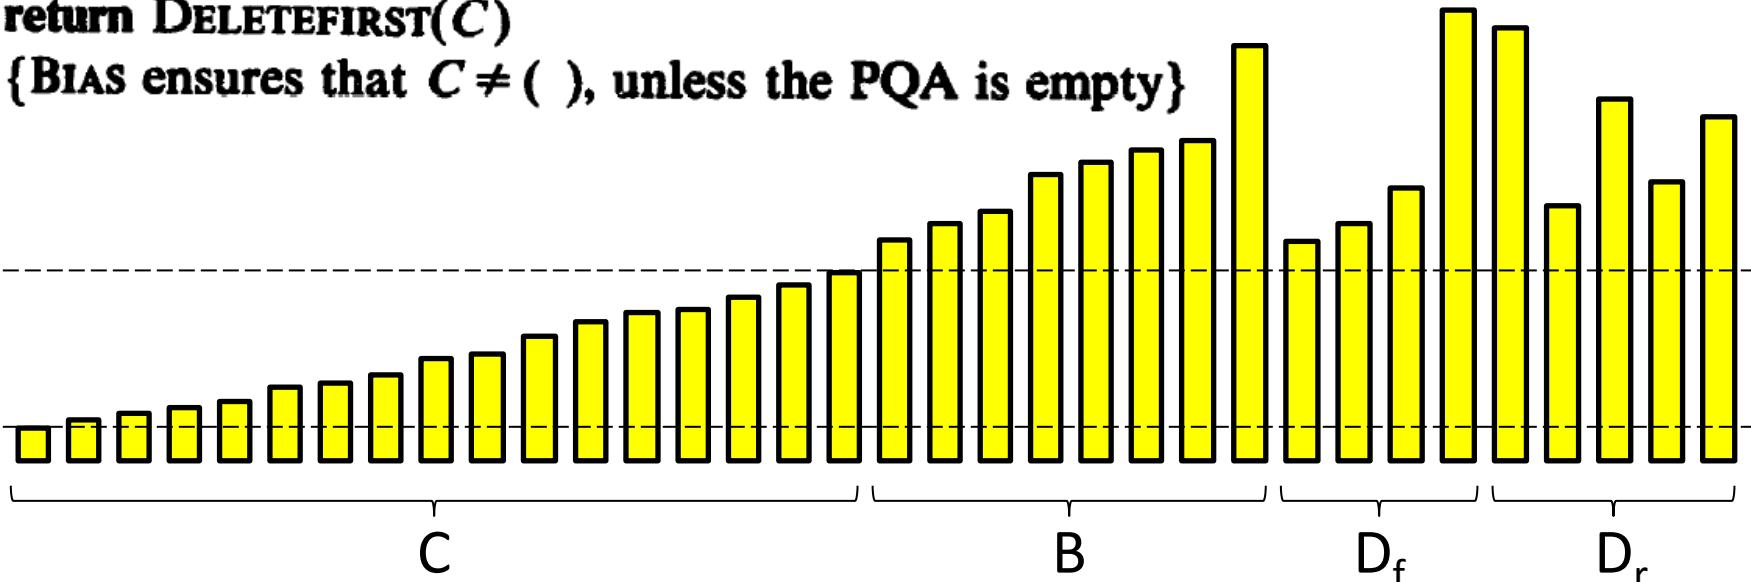

BIAS ≡

if $D_r \neq ()$ **then**

{Clean-up step}

if $D_f \neq ()$ **and** $\text{last}(D_f) \geq \text{first}(D_r)$ **then**

A **DELETELAST**(D_f) {decrease $|D_f|$ }

B **else PASS**(D_r, D_f) {decrease $|D_r|$; increase $|D_f|$ }

else if $D_f \neq ()$ **and** ($B = ()$ **or** $\text{first}(B) \geq \text{first}(D_f)$) **then**

C $D_f, B, C := (), (), C \parallel D_f$ {decrease $|D_f|$; increase $|C|$ }

D else if $B \neq ()$ **then PASS**(B, C) {increase $|C|$ }

{**else** $B = D_f = D_r = ()$ }

Invarianter





1) C, B, D_f sorterede

2) $\max C \leq \min(B \cup D_f \cup D_r)$

3) $|C| \geq |D_f| + 2|D_r|$

$\geq " +1 "$

BIAS

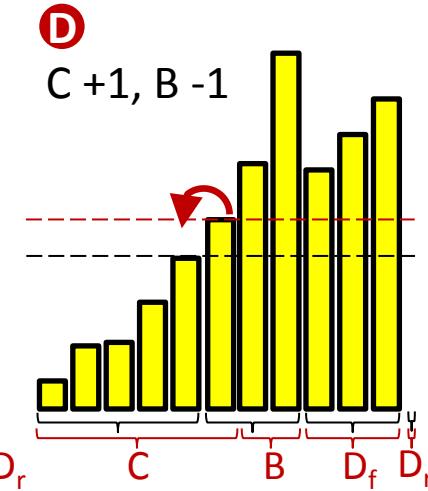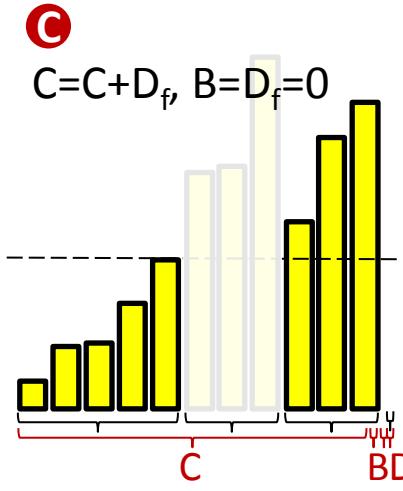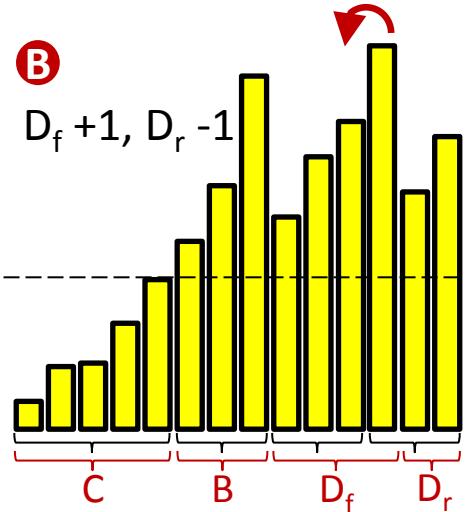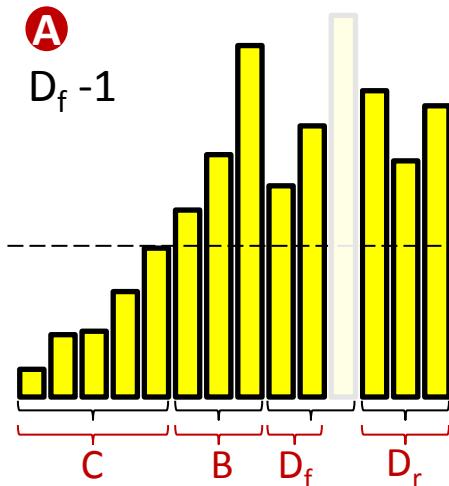

Sætning

Create, Insert og DeleteMin tager **worst-case** $O(1)$ tid

Invarianter

- 1) C, B, D_f sorterede
- 2) $\max C \leq \min (B \cup D_f \cup D_r)$
- 3) $|C| \geq |D_f| + 2|D_r|$

